


# Split Core Current Transformer

The **500 Series** Split Core Current Transformer is designed to be assembled around an existing conductor or bus bar. The end marked "This end removable" may be disassembled and then reassembled around the conductors.



## HOW TO ORDER TAKE APART C.T.'S

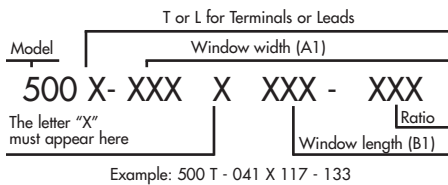

DIMENSIONS						MAX RATIO
A1'	A2'	A3'	B1'	B1'	B1'	
4.1	6.4	7.3	7.1	10.0	10.9	4000:5
4.1	6.4	7.3	11.7	14.5	15.4	8000:5
4.1	6.4	7.3	14.1	17.0	17.9	8000:5
4.1	6.4	7.3	18.1	21.0	21.9	8000:5
4.1	6.4	7.3	24.0	27.0	27.9	10000:5
4.1	6.4	7.3	30.1	33.0	33.9	10000:5
5.1	7.2	8.3	7.1	10.0	10.9	4000:5
5.1	7.2	8.3	11.7	14.5	15.4	8000:5
5.1	7.2	8.3	14.1	17.0	17.9	8000:5
5.1	7.2	8.3	18.1	21.0	21.9	8000:5
5.1	7.2	8.3	24.0	27.0	27.9	10000:5
5.1	7.2	8.3	30.1	33.0	33.9	10000:5
5.8	7.0	9.0	7.1	10.0	10.9	4000:5
5.8	7.0	9.0	11.7	14.5	15.4	8000:5
5.8	7.0	9.0	14.1	17.0	17.9	8000:5
5.8	7.0	9.0	18.1	21.0	21.9	8000:5
5.8	7.0	9.0	24.0	27.0	27.9	10000:5
5.8	7.0	9.0	30.1	33.0	33.9	10000:5
8.0	9.5	11.1	7.1	10.0	10.9	4000:5
8.0	9.5	11.1	11.7	14.5	15.4	8000:5
8.0	9.5	11.1	14.1	17.0	17.9	8000:5
8.0	9.5	11.1	18.1	21.0	21.9	8000:5
8.0	9.5	11.1	24.0	27.0	27.9	10000:5
8.0	9.5	11.1	30.1	33.0	33.9	10000:5
10.1	11.6	13.2	7.1	10.0	10.9	4000:5
10.1	11.6	13.2	11.7	14.5	15.4	8000:5
10.1	11.6	13.2	14.1	17.0	17.9	8000:5
10.1	11.6	13.2	18.1	21.0	21.9	8000:5
10.1	11.6	13.2	24.0	27.0	27.9	10000:5
10.1	11.6	13.2	30.1	33.0	33.9	10000:5

### Application

Metering

### Frequency

50-400Hz

### Insulation Level

0.6 kV, BIL 10 kV full wave

### Continuous Thermal Current Rating

Factor 1.33 at 30° C amb., 1.00 at 55° C amb

### Terminals

8-32 brass studs with one flatwasher, lockwasher and regular nut

### Flexible Leads

UL 1015 105° C, CSA approved, #16 AWG, 24" long unless otherwise specified

### Approximate Weight

8 to 18 lbs

### Regulatory Agencies



The accuracy table below is for the 500T-041 X 117. Accuracies for other sizes are available from the factory. The dimensions in the table at the left are standard sizes. Other window lengths (B1) may be accommodated on special order. Window widths (A1) other than those listed are not available.

Current Ratio	Accuracy class with U.P.F. burden
300:5	±5% at 1.5 VA
400:5	±3% at 2.5 VA
500:5	±2% at 2.5 VA
600:5	±1% at 4 VA
750:5	±1% at 5 VA
800:5	±1% at 5 VA
1000:5	±1% at 7.5 VA
1200:5	±1% at 10.0 VA
1500:5	±1% at 12.5 VA
2000:5	±1% at 15.0 VA
2500:5	±1% at 25.0 VA
3000:5	±1% at 25.0 VA
3500:5	±1% at 25.0 VA
4000:5	±1% at 25.0 VA
5000:5	±1% at 30.0 VA
5000:5	±1% at 40.0 VA



Another HUNTINGTON ELECTRIC Company

CR Magnetics, Inc. 3500 Scarlet Oak Blvd. St. Louis MO USA 63122 V: 636-343-8518 F: 636-343-5119

Web: <http://www.crmagnetics.com>

E-mail: [sales@crmagnetics.com](mailto:sales@crmagnetics.com)