

True RMS AC Voltage Transducer

DIN RAIL / PANEL MOUNT, TRUE RMS



CR4510 CR4511 CR4520

Single Element
50 to 500 VAC Input Range



CR4550 CR4560
CR4570 CR4580

Three Element
50 to 500 VAC Input Range

The **CR4500** Series, True RMS Voltage Transducers and Transmitters are designed for applications where AC voltage waveforms are not purely sinusoidal. More precise and accurate than other devices, these units are ideal in chopped wave and phase fired control systems.

Applications

Phase fired controlled devices
Quickly varying voltage supplies
Chopped waveform drivers
Harmonic voltages

Features

35mm DIN rail mount or panel mount
Available with 0-5 VDC, 0-10VDC or 4-20 mADC output
24 VDC powered
Highest precision available
Outputs isolated from inputs
Connection diagram printed on case

Regulatory Agencies

Approved to UL 61010B-1
Approved to CAN/CSA-C22.2, No. 61010-1-2004
Meets requirement of IEC 61010-1 and BS EN 61010-1



CR Magnetics has a wide selection of potential transformers to extend the range of any part. Contact factory for more information.

PART NUMBERS			
CR4510	-		Single element with 0 - 5 VDC output
CR4511	-		Single element with 0 - 10 VDC output
CR4520	-		Single element with 4 - 20 mADC output
CR4550	-		3-Phase 3-Wire with 0 to 5 VDC Output
CR4560	-		3-Phase 3-Wire with 4 - 20 mADC Output
CR4570	-		3-Phase 4-Wire with 0 to 5 VDC Output
CR4580	-		3-Phase 4-Wire with 4 - 20 mADC Output

Add suffix for input range

- 50** - 0-50 VAC
- 150** - 0-150 VAC
- 250** - 0-250 VAC
- 500** - 0-500 VAC *

Ranges available up to and including 600 VAC

* UL Recognition Pending



Another HUNTINGTON ELECTRIC Company

CR Magnetics, Inc. 3500 Scarlet Oak Blvd. St. Louis MO USA 63122 V: 636-343-8518 F: 636-343-5119

Web: <http://www.crmagnetics.com>

E-mail: sales@crmagnetics.com



Transducers

True RMS AC Voltage Transducer



DIN RAIL / PANEL MOUNT, TRUE RMS

SPECIFICATIONS

Basic Accuracy:.....	0.5%	MTBF:.....	Greater than 100 K hours
Calibration:.....	True RMS Sensing	Output Load:.....	0-5 VDC - 2 K Ω or greater 4-20 mADC - 0 to 300
Thermal Drift:.....	500 PPM/ $^{\circ}$ C	Relative Humidity:.....	80% for temperatures up to 31 $^{\circ}$ C and decreasing linearly to 50% at 40 $^{\circ}$ C
Operating Temperature:.....	0 $^{\circ}$ C to +60 $^{\circ}$ C	Supply Current:	
Installation Category:.....	CAT II	CR4510:.....	Typical 15mA Max 25mA
Pollution Degree:.....	2	CR4520:.....	Typical 25mA Max 40mA
Response Time:	250 ms	CR4550/70:.....	Typical 20mA Max 60mA
Altitude:.....	2000 meter max.	CR4560/80:.....	Typical 55mA Max 110mA
Insulation Voltage:.....	2500 Vdc	Torque Specs:.....	3.0 inch lbs. (0.4Nm)
Supply Voltage:.....	24 Vdc \pm 10%	Weight:.....	0.5 lbs.
Frequency Range:.....	20 Hz - 5 KHz		
Cleaning:.....	Water-dampened cloth		

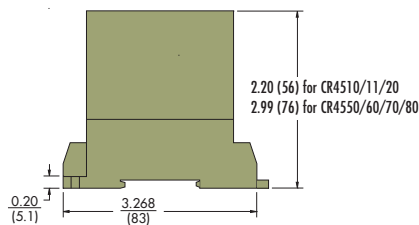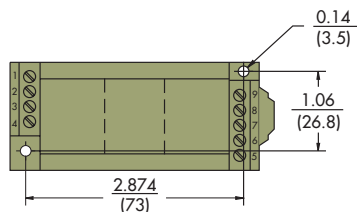


Dimensions for Models CR4550, CR4560, CR4570, CR4580 (shown)

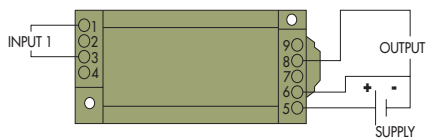


CR4510

Single Phase - 0 - 5 VDC Output

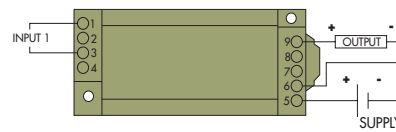


CR4520

Single Phase - 4 - 20 mADC Output

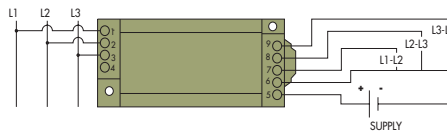


CR4550

3 Phase, 3 Wire - 0 - 5 VDC Output

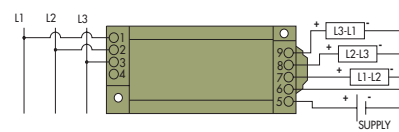


CR4560

3 Phase, 3 Wire - 4-20 mADC Output

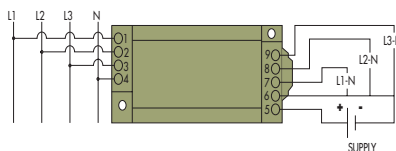

CR4570

3 Phase, 4 Wire - 0 - 5 VDC Output

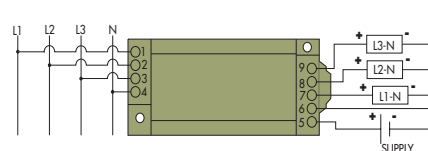

CR4580

3 Phase, 4 Wire - 4 - 20 mADC Output

OUTLINE DRAWING

CONNECTION DIAGRAM

NOTE: The building installation must have a switch or circuit-breaker that is in close proximity and within easy reach of the operator. The switch or circuit breaker shall be marked as the disconnecting device for the equipment.



Another HUNTINGTON ELECTRIC Company

CR Magnetics, Inc. 3500 Scarlet Oak Blvd. St. Louis MO USA 63122 V: 636-343-8518 F: 636-343-5119

Web: <http://www.crmagnetics.com>

E-mail: sales@crmagnetics.com